


HYPRO[®]

TECHNOLOGY ON TARGET

Spray Nozzles Selection Guide

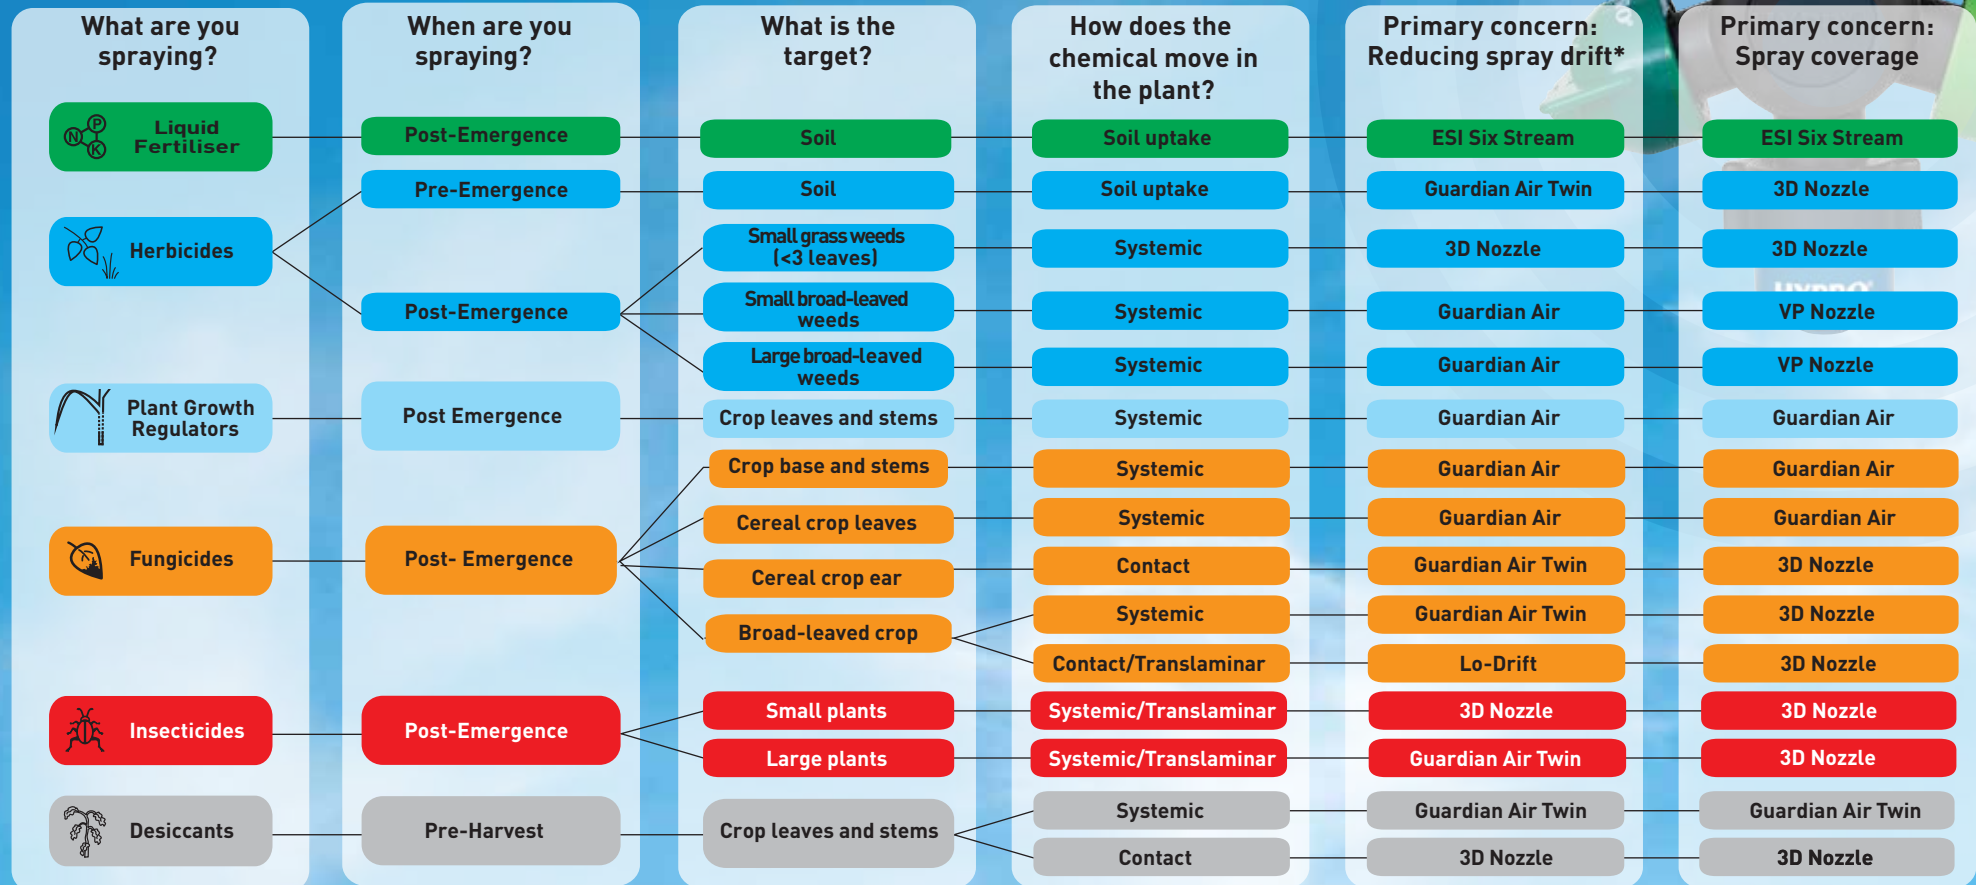

*Spray quality and therefore drift reduction will vary with pressure, for details see our pocket guide. Guardian Air and Guardian Air Twin should be used at 3 bar for optimum coverage and lower pressures for optimum drift reduction. Always comply with the agrochemical label or latest manufacturer's advice on the spray quality that should be used for an application.



ESI Six Stream



Ultra Lo-Drift



Guardian Air



Guardian Air Twin



Lo-Drift



3D Nozzle



VP Nozzle



Hypro offer a Pocket Guide with details of all application rates and spray qualities and a SprayIT nozzle selector App for iOS and Android. For more details see our website.



www.hypro-eu.com

Hypro EU Ltd
Station Road, Longstanton
Cambridge CB24 3DS
Tel: +44 (0)1954 260097
e: euinfo@pentair.com
Copyright 10/14